

SECTIONAL OVERHEAD INDUSTRIAL DOOR
SIN201 HIGH LIFT, STANDARD COLOUR

version07

General information

Sectional overhead doors manufactured in AS Saku Metall open vertically and move along guide rails up under the ceiling. Construction of sectional door needs little space and seals in edges ensure weather-resistance of door and minimum heat losses. Sections have special shape, making it impossible to crush fingers with the panel when closing the door. Industrial sectional door is suitable for use in industrial buildings and commercial facilities. It is not recommended to install the door into humid or chemically active environment.

Dimensions

Construction aperture: width (B) <8000; height (H) <6000

Construction aperture with passage door: width (B) <4500; height (H) 2180 - 6000

Light aperture of passage door: 900 x 1860

Lintel height (h) = 750...4100

Dimensions of light aperture = dimensions of construction aperture

Thickness of door sheet: 40

Free lateral space (PL*): >150

Door sheet

Door sheet consists of 40 mm thick heat-insulated sections, with finger pinch protection. Insulation is thick freon-free polyurethane foam, surrounded with aluminium or galvanized steel sheet. Steel sections are painted with weather-proof polyester paint. Standard tones of door of steel sections – internal side white RAL 9010, external side white RAL 9010, dark brown RAL 8014 or silver RAL 9006. Aluminium sections are made of non-painted natural aluminium. Additional reinforcement: horizontal sheet metal stripes in upper and lower edges of internal side, to which connection hinges of sections are fixed. Heat transfer coefficient of sections $U = 0,9 \text{ W}/(\text{m}^2 \cdot ^\circ\text{C})$.

Passage door

Passage door with overall dimensions 1030 x 1965 and illuminating surface with dimensions 900 x 1860 have been made of aluminium profiles and sealed with EPDM seal. You can get additional information about the closures for passage doors from the seller.

Control system

Guide rail system is installed to internal side of door aperture, which is made of galvanized 2,0 mm steel profiles and along which door sections move up and down with the help of rolls. High lift is ideal for industrial and production buildings where the lintel height is 750 mm.

Balancing

High-quality torsion spring is used for balancing of door sheet. Standard life is 15000 cycles, but torsion springs with up to 100 000 cycles can be ordered. All torsion springs have spring break protectors and in order to ensure better safety, wire break protectors are included with 18 m² doors.

Sealing

EPDM rubber is used in upper and lower edge of door to increase air tightness of door. Sides are sealed with special gasket made of mix of PVC and rubber (TPR). Seals are also in connection points of sections.

Maintenance

Depending on the usage intensity of the door, a specialist with appropriate training must service the door after every 1,800 cycles. This must be done at least once per year – the usage life of the door will be significantly longer this way. It is possible to sign a maintenance contract upon purchasing the door.

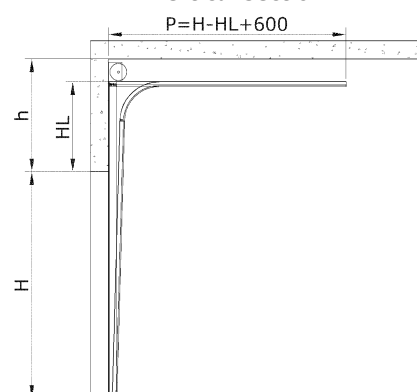
Accessories

Following accessories can be installed to the door:

- Plastic windows
- Ventilation grids
- Automatic system
- Manual chain drive
- External lock
- Passage door

Conformance to the standard

Sectional overhead industrial door with high lift meets the harmonized product standard EN 13241-1:2005+A1:2011.


vertical section

horizontal section
